

THE GENERAL

Today's evolving operations call for advanced sand control & monitoring solutions in production & flowback. Sandtinel[®] offers solutions that are highly effective, simple, safe, & versatile that also reduce environmental impacts.

The General commands facilities & multi-well pads by controlling, storing & eliminating vast quantities of produced sand.

DON'T HOLD YOUR WELL BACK

KEY SPECIFICATIONS

MAWP PSI	1,440psi
PRODUCTION UP TO	60,000BPD @ 15MMSCFD
INTERIOR DIAMETER (ID)	96"
EFFICIENT STORAGE	1,000 - 4,000lbs
CAPTURE RATE	95+%
VL-TEK VAPOR LOCK	✓
FILTER-LESS	✓

APPLICATION





PROTECTING FACILITIES

- 95%+ SAND REMOVAL
- 50% LESS EQUIPMENT
- 55x LOWER EMISSIONS*
- ELIMINATE DOWNTIME
- ELIMINATE CHARGEBACKS


*Compared to traditional cyclonic & hydro-cyclonic separators.

BOOK A DEMO: (833) 539-7263

THE SCIENCE OF SAND™

SANDTINEL OPERATING CURVES: 96" GENERAL

50% - 80% water cut; 600 - 1400 psi
Minimum 95% sand removal @ 100 mesh

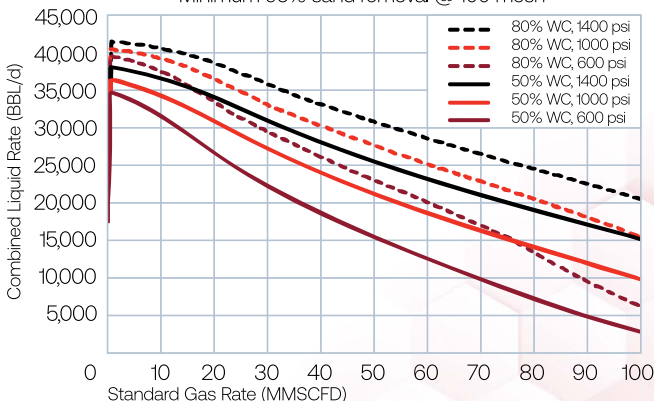

THE SANDTINEL ADVANTAGE

- CFD Modeling & Analysis
- Enhanced Data & Reporting
- Engineering & Field Support
- Tailored Proposals & Features
- Global Reach with Local Service

DRAIN CYCLE EMISSIONS COMPARISONS

SANDTINEL vs. Cyclonic

